





CRP 612: Eagle Creek Road Improvement Project

Chumstick Highway to Milepost 3.3 (MP 0.00—3.30)

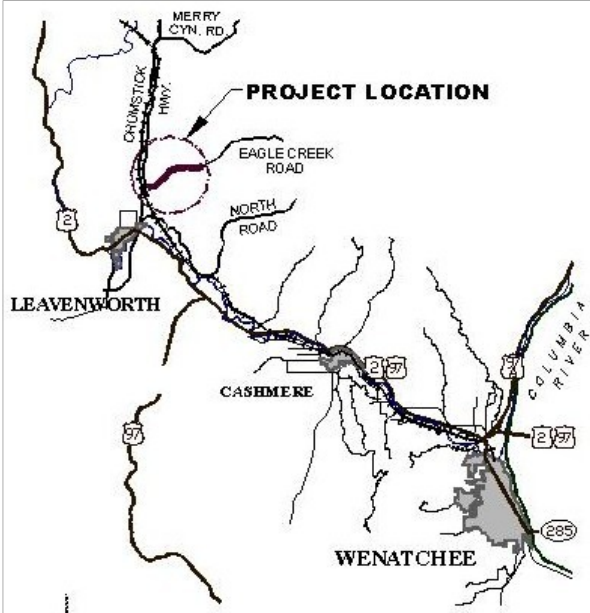

Project Vicinity Map

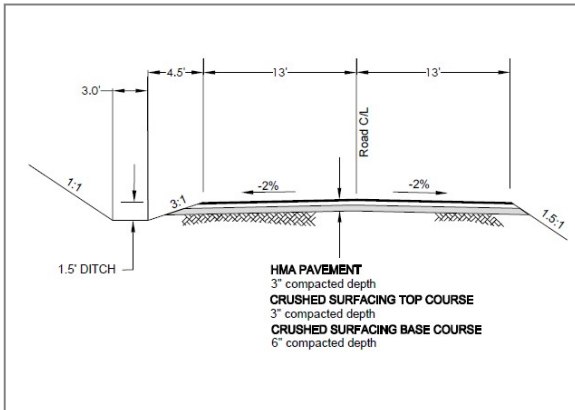

Project Typical Section

Project Number: County Road Project 612

Project Length: 3.3 miles

Basis for Project: Road Improvement & Safety

Construction: Summer 2011

Project Description: This project improved pavement structure; vertical and horizontal alignment; drainage; and clear zone area. The existing deficient 16 to 20-foot wide roadway was widened to a 3R standard width of 26-feet. Roadway safety improvements included an all-weather surface and re-establishment of road-side ditches along with utility relocations, sight distance, corridor intersection improvements, guardrail and wall installation. The project was completed in November 2011.

Notes: In August 2012, this project was awarded WSDOT/FHWA Excellence Award for Best County Project. [Click here](#) for the complete WSDOT/FHWA award announcement.

Status: Complete (139 Working Days)

Funding Sources:

Rural Arterial Program	\$1,647,000
Western Federal Lands	\$1,000,000
County Road Safety Program	\$400,000

TOTAL: \$3,047,000



(Left) Rehabilitated Eagle Creek Road



(Left) Bjork Creek Work During Construction